



Modern Relay




Quadrilateral Relay Characteristics

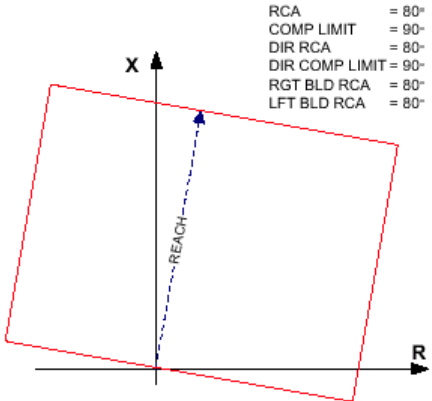


RCA = 80°
 COMP LIMIT = 90°
 DIR RCA = 80°
 DIR COMP LIMIT = 90°
 RGT BLD RCA = 80°
 LFT BLD RCA = 80°

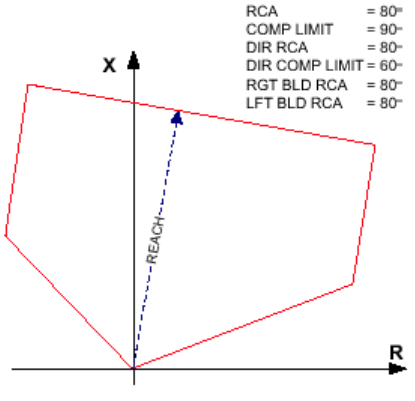

RCA = 80°
 COMP LIMIT = 90°
 DIR RCA = 80°
 DIR COMP LIMIT = 60°
 RGT BLD RCA = 80°
 LFT BLD RCA = 80°

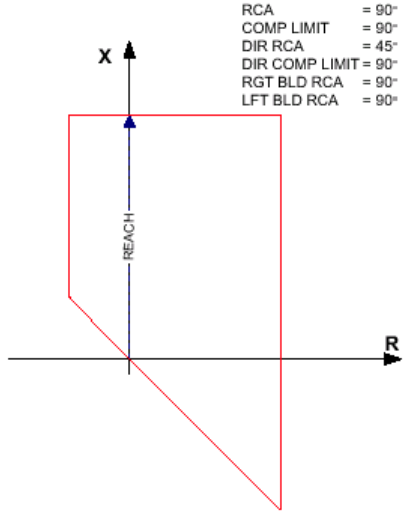

RCA = 90°
 COMP LIMIT = 90°
 DIR RCA = 45°
 DIR COMP LIMIT = 90°
 RGT BLD RCA = 90°
 LFT BLD RCA = 90°

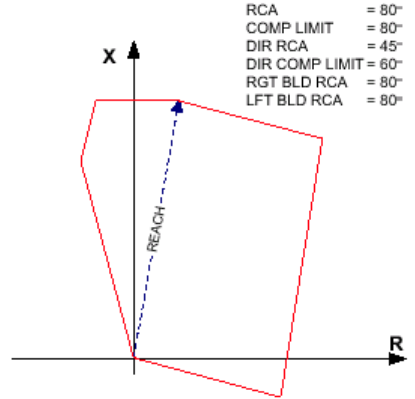

RCA = 80°
 COMP LIMIT = 80°
 DIR RCA = 45°
 DIR COMP LIMIT = 60°
 RGT BLD RCA = 80°
 LFT BLD RCA = 80°

83723A1.CDR




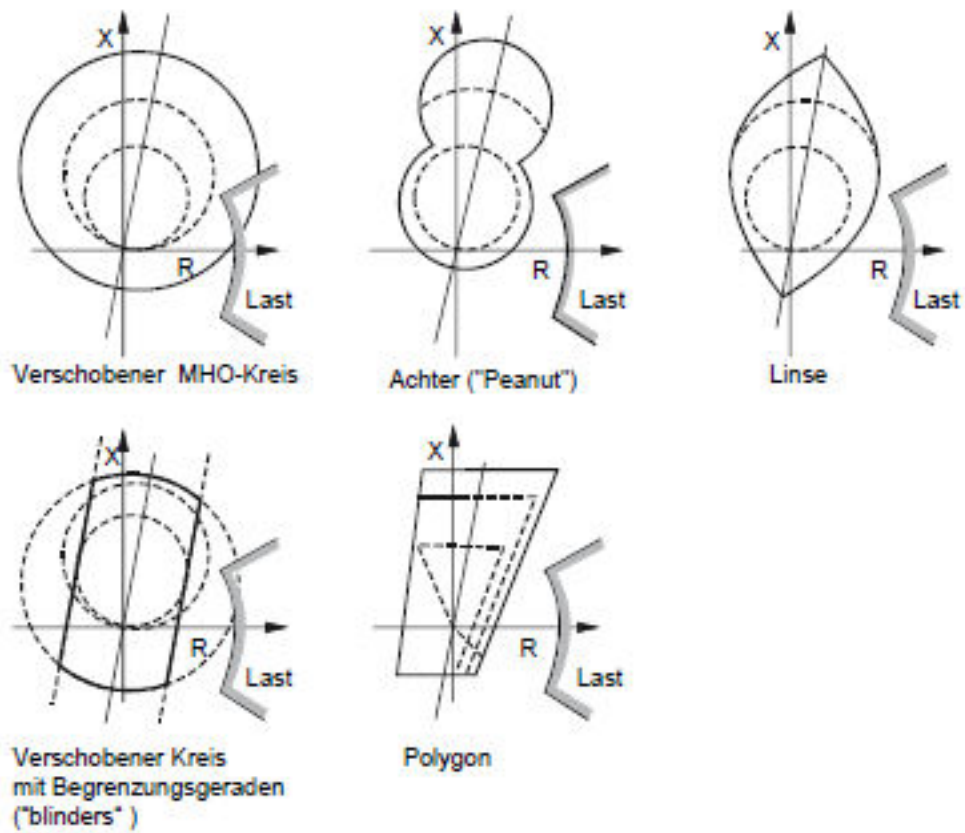


Bild 3.18 Impedanzanregung in konventioneller Technik

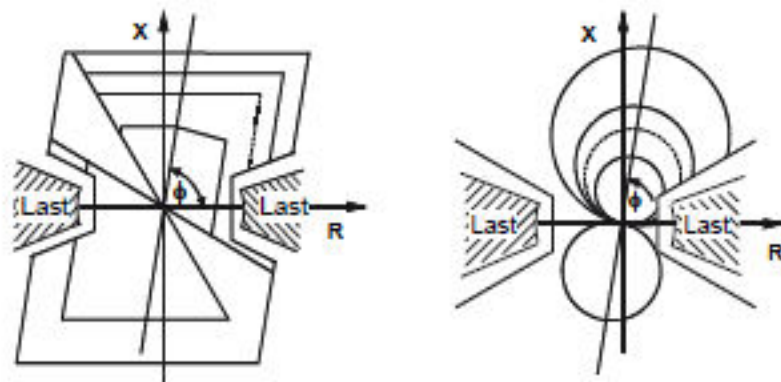

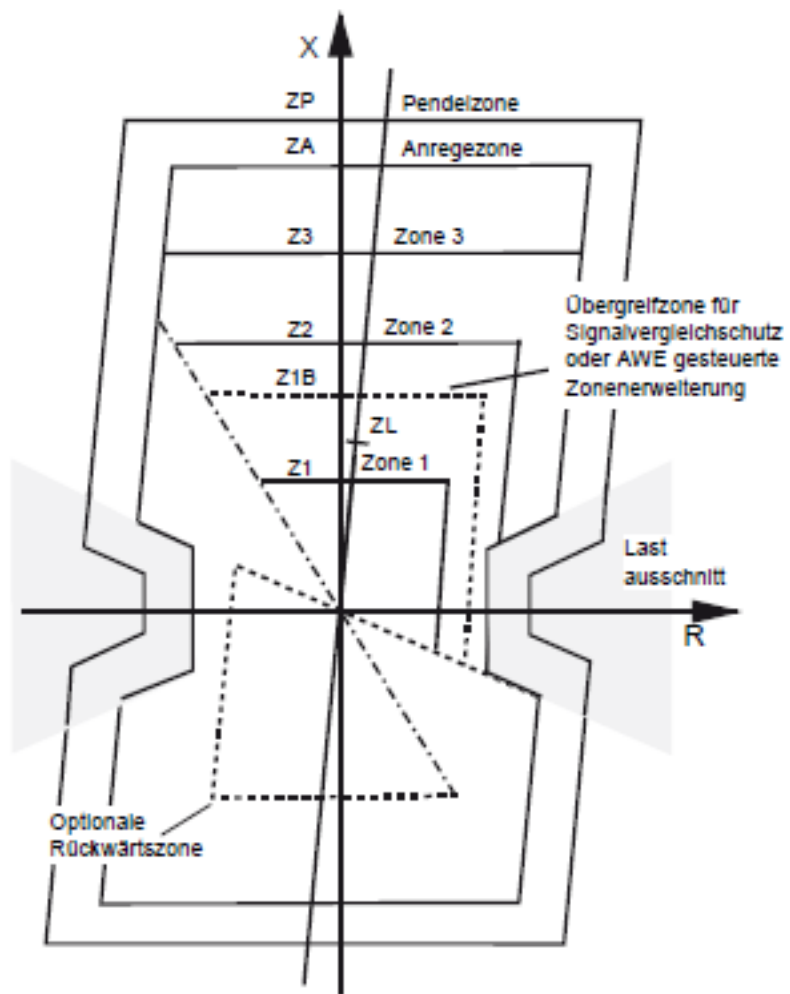

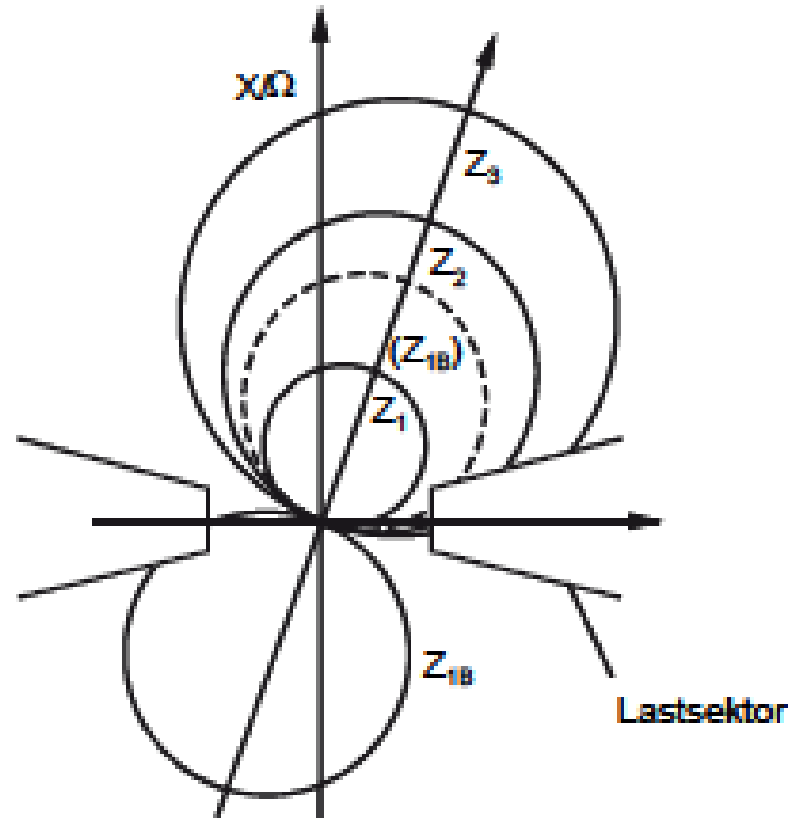

Memory Polarization

