

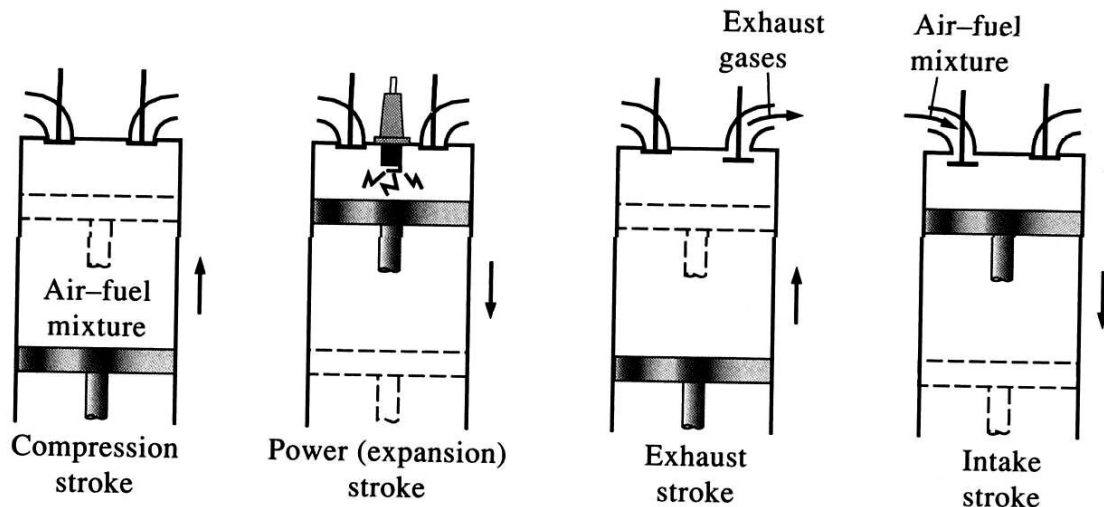
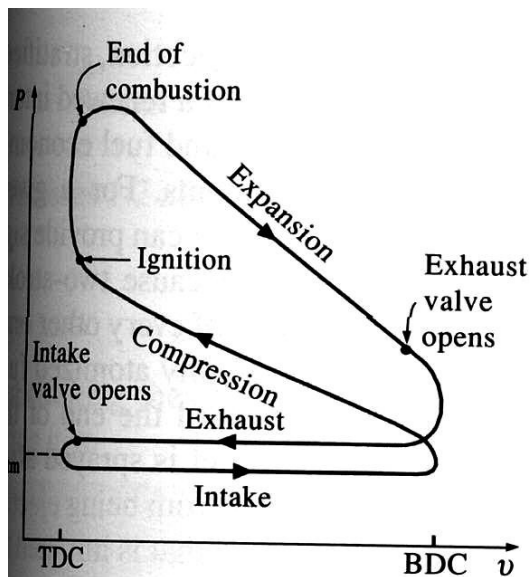


Gas Power Cycle - Internal Combustion Engine

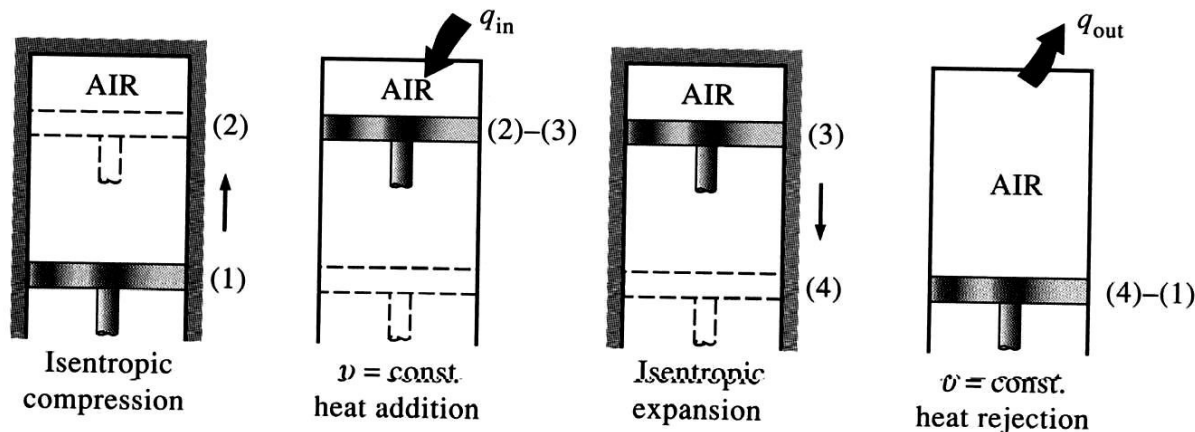


(a) Actual four-stroke spark-ignition engine

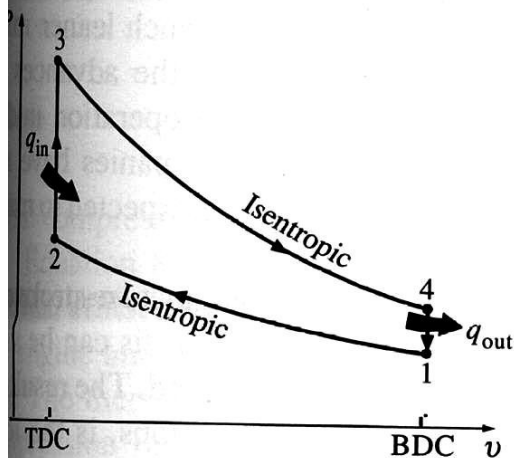

(b) Ideal Otto cycle

[Otto Cycle](#)

Otto Cycle

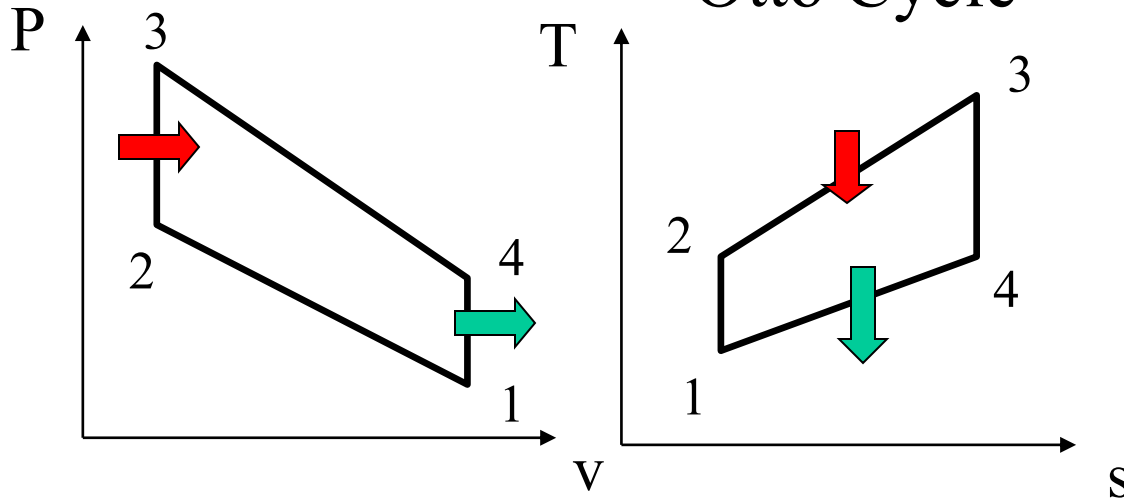

- 1-2 isentropic compression
- 2-3 constant volume heat transfer
- 3-4 isentropic expansion
- 4-1 constant volume heat rejection

Thermal efficiency of the system:

$$\eta = \frac{W_{\text{cycle}}}{Q_{\text{in}}} = \frac{W_{34} + W_{12}}{Q_{23}} = \frac{m[(u_3 - u_4) + (u_1 - u_2)]}{m(u_3 - u_2)} = 1 - \frac{(u_4 - u_1)}{(u_3 - u_2)}$$


$$\text{For an ideal gas, } u = C_v T, \quad \eta = 1 - \frac{(u_4 - u_1)}{(u_3 - u_2)} = 1 - \frac{C_v(T_4 - T_1)}{C_v(T_3 - T_2)} = 1 - \frac{T_1}{T_2} \left(\frac{T_4/T_1 - 1}{T_3/T_2 - 1} \right)$$

Since $T_4/T_1 = T_3/T_2$ (why?)

$\eta = 1 - \frac{T_1}{T_2}$. From isentropic compression relation for an ideal gas

$$\frac{T_1}{T_2} = \left(\frac{V_2}{V_1} \right)^{k-1} = \frac{1}{r^{k-1}}, \text{ where } r = \left(\frac{V_1}{V_2} \right) \text{ is the volume compression ratio}$$

Otto Cycle-2

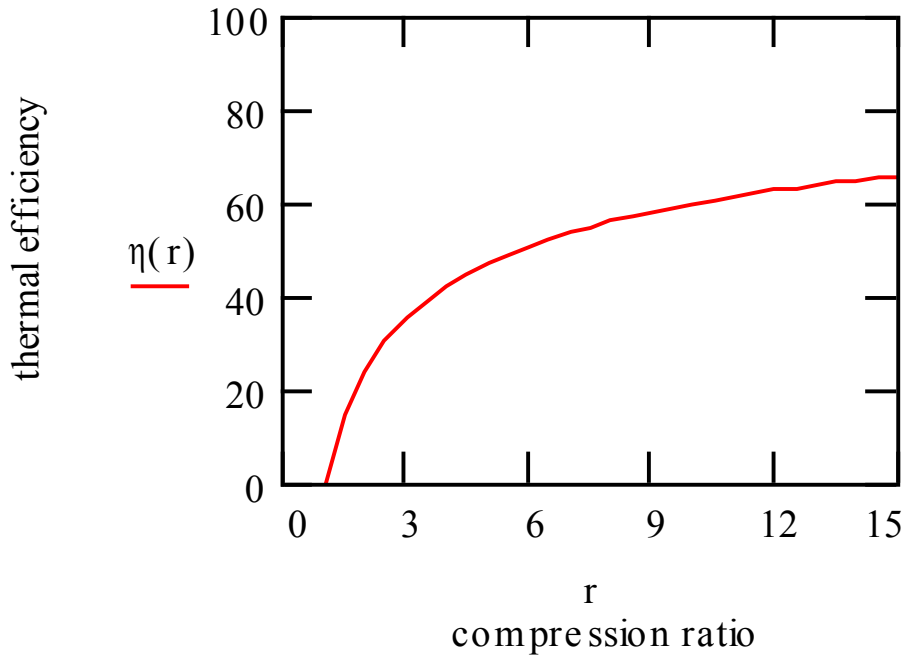

Thermal efficiency of an Otto cycle,

$$\eta = 1 - \frac{1}{r^{k-1}}$$


Typical value of r for a real engine:
between 7 and 10

- The higher the compression ratio, the higher the thermal efficiency.
- Higher r will lead to engine knock (spontaneous ignition) problem.

Improvement of Performance

- Increase the compression ratio
- Increase the engine displacement: more power
- Compress more air into the cylinder during intake: using [supercharger](#) and turbocharger.
- Cool the air before allowing it to enter the cylinder: cooler air can expand more, thus, increase the work output.
- Reduce resistance during intake and exhaust stages: multiple valve configuration: 4 cylinders/16 valves engine
- [Fuel injection](#): do away with the [carburetor](#) and provide precise metering of fuel into the cylinders.

Diesel Cycle

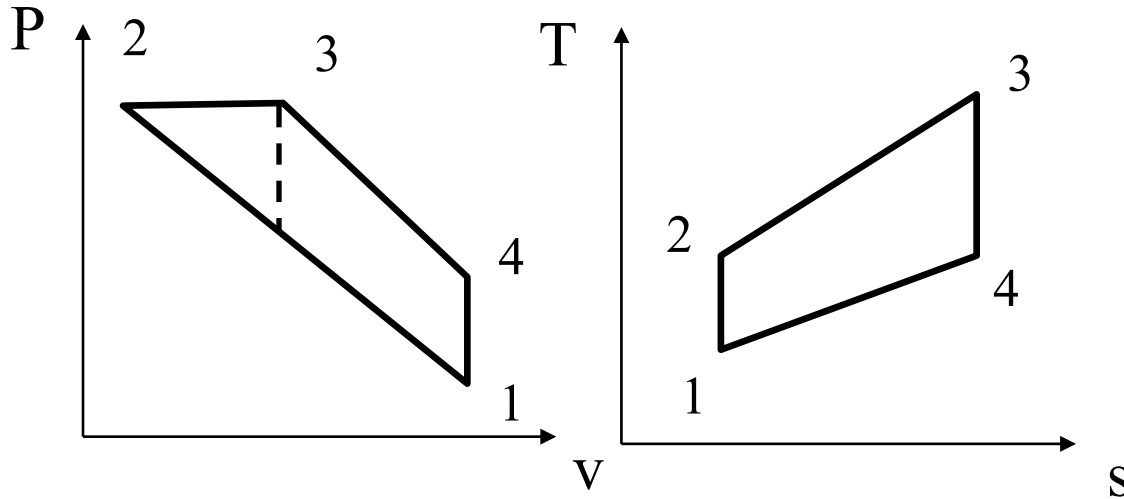

2-3: a constant pressure process (instead of a constant volume process) and is the only difference between an idealized Diesel cycle and an idealized Otto cycle.

- Fuel injection for an extended period during the power stroke and therefore maintaining a relatively constant pressure.
- Diesel cycle has a lower thermal efficiency as compared to an Otto cycle under the same compression ratio.
- In general, Diesel engine has a higher thermal efficiency than spark-ignition engine because the Diesel engine has a much higher compression ratio.
- Compression-ignition: very high compression ratio 10 to 20 or even higher.

[Diesel Cycle](#)

[Internal Combustion Engine](#)