
Threaded Binary Tree (B+)

 All data is stored at the leaf nodes (*leaf pages*); all other nodes (*index pages*) only store keys


B+ Trees


- Similar to B trees, with a few slight differences
- All data is stored at the leaf nodes (*leaf pages*); all other nodes (*index pages*) only store keys
- Leaf pages are linked to each other
- Keys may be duplicated; every key to the right of a particular key is >= to that key

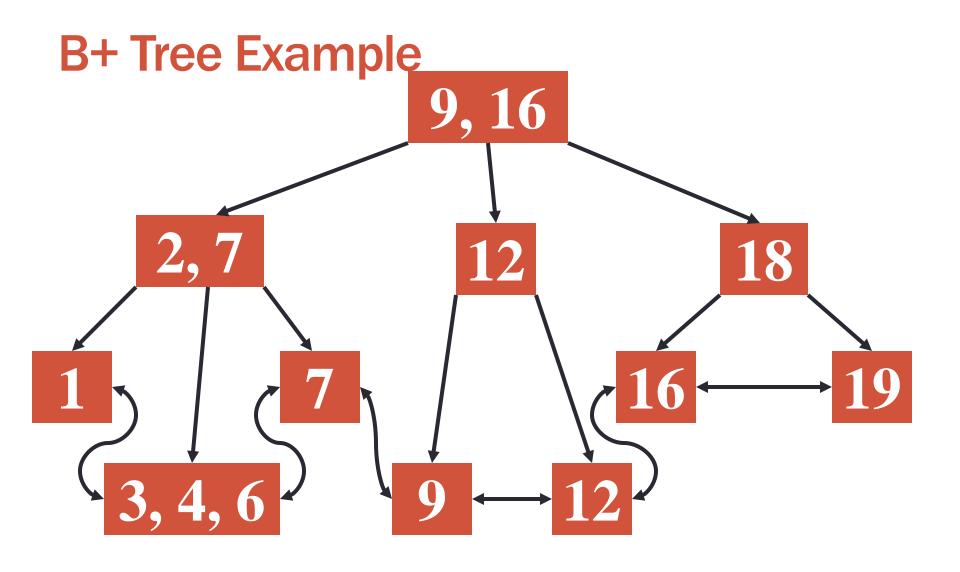


B+ Tree Insertion


- Insert at bottom level
- If leaf page overflows, split page and copy middle element to next index page
- If index page overflows, split page and move middle element to next index page

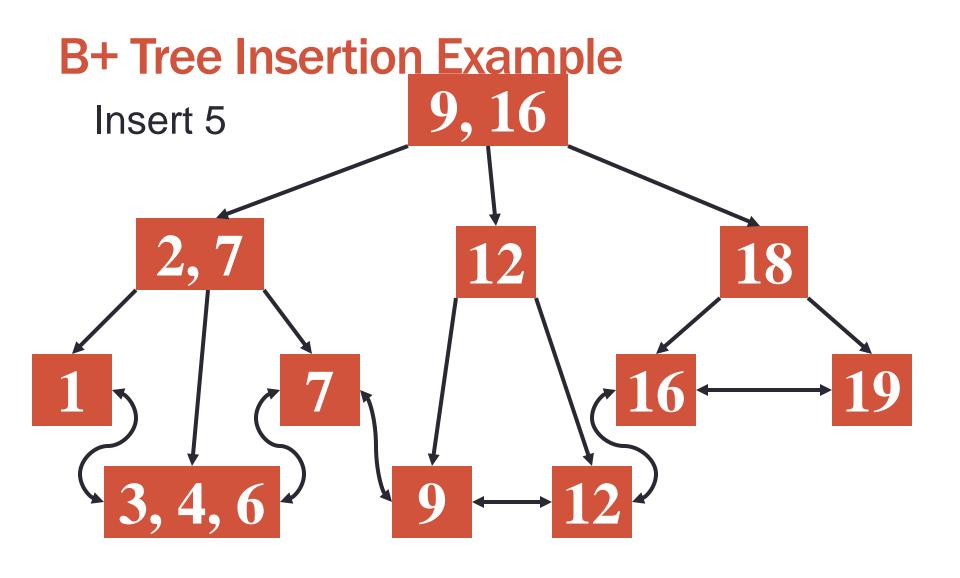

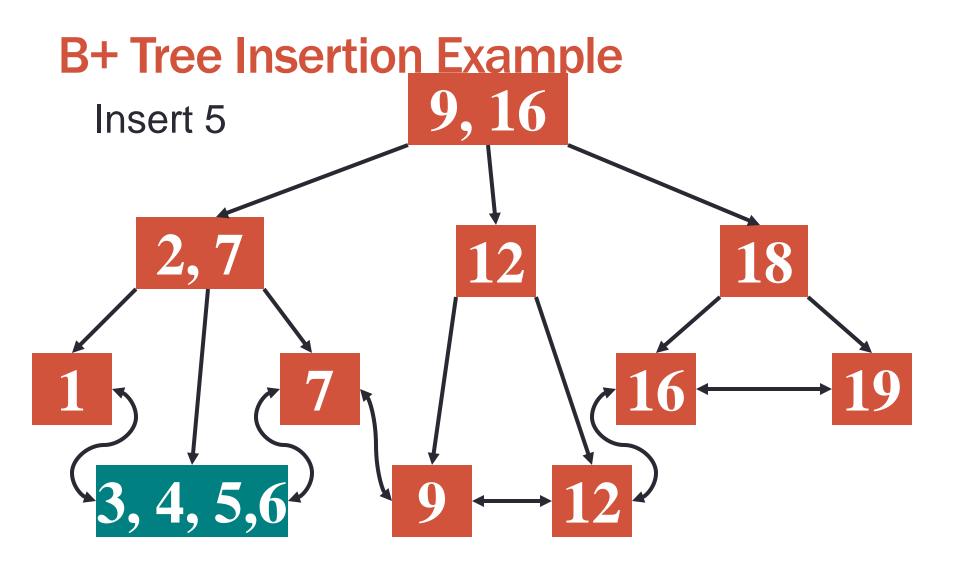


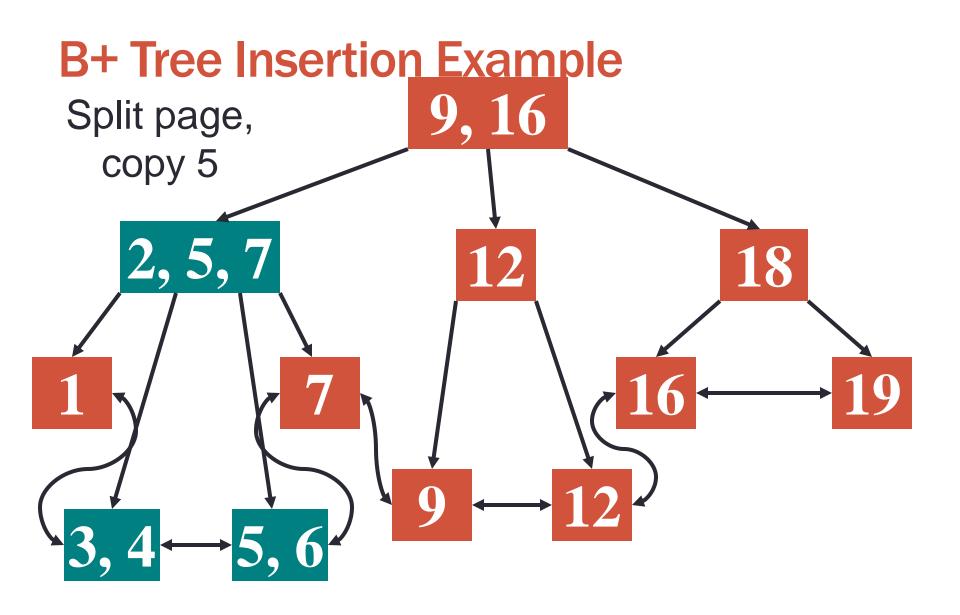


Insert 17

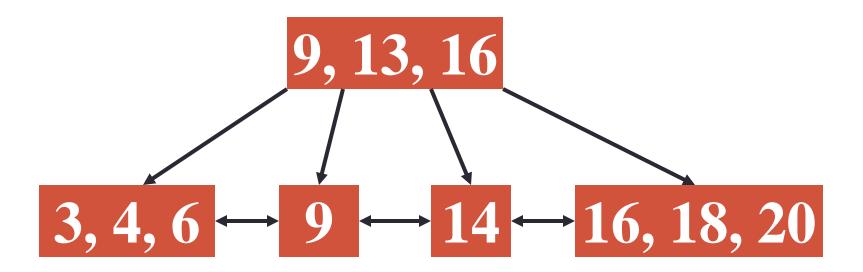


Insert 17

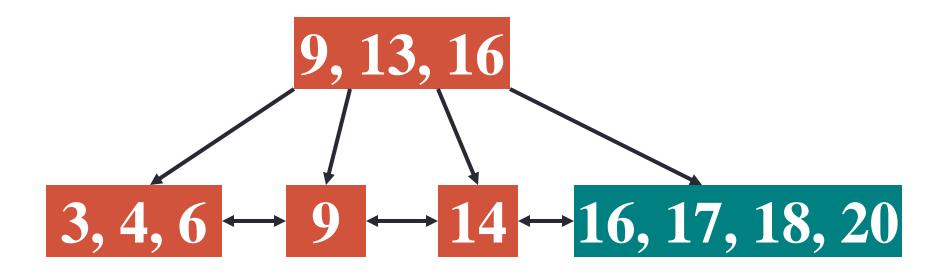


Split leaf page, copy 18

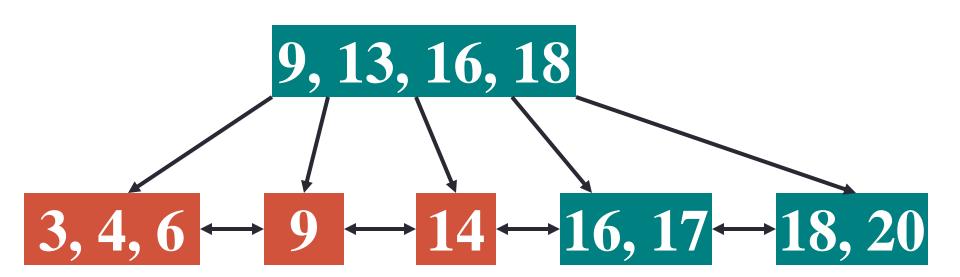


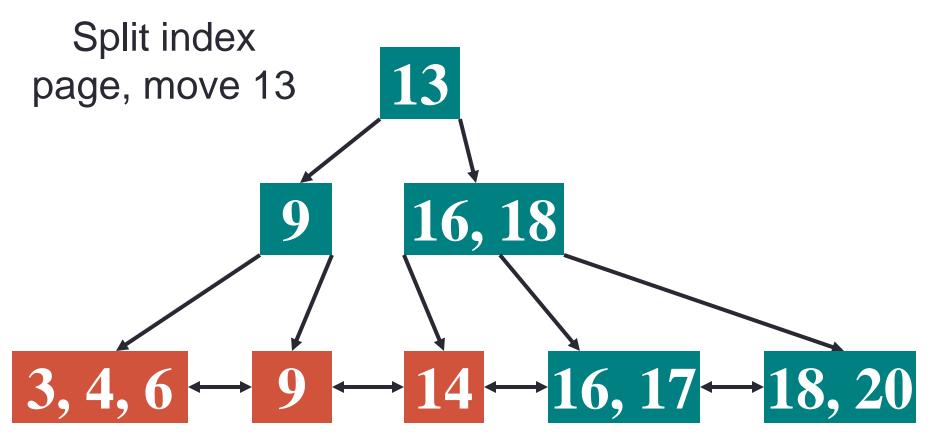


B+ Tree Deletion


- Delete key and data from leaf page
- If leaf page underflows, merge with sibling and delete key in between them
- If index page underflows, merge with sibling and move down key in between them

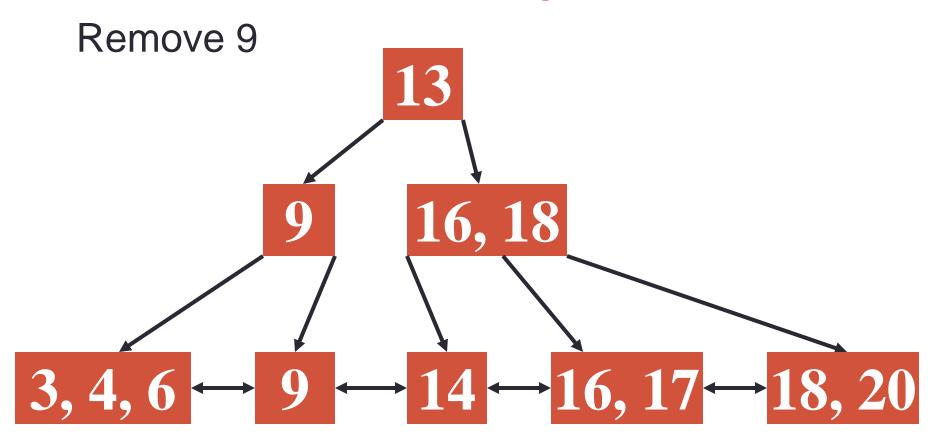

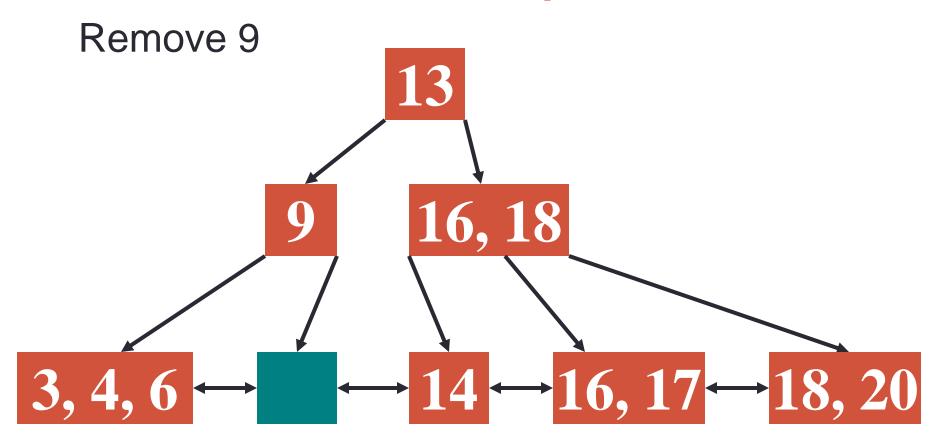

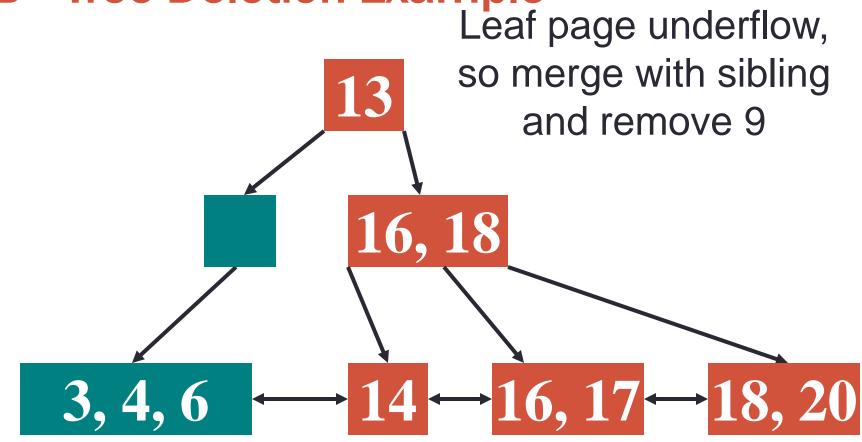

Index page underflow, so merge with sibling and demote 13

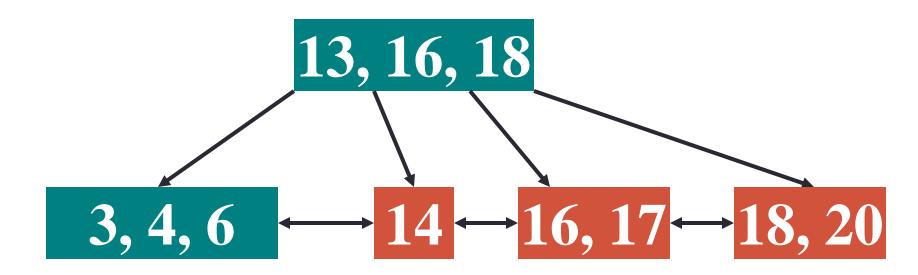

Threaded Trees


- Binary trees have a lot of wasted space: the leaf nodes each have 2 null pointers
- We can use these pointers to help us in inorder traversals
- We have the pointers reference the next node in an inorder traversal; called threads
- We need to know if a pointer is an actual link or a thread, so we keep a boolean for each pointer

Threaded Tree Code


Example code:

```
class Node {
    Node left, right;
    boolean leftThread, rightThread;
}
```


Threaded Tree Example

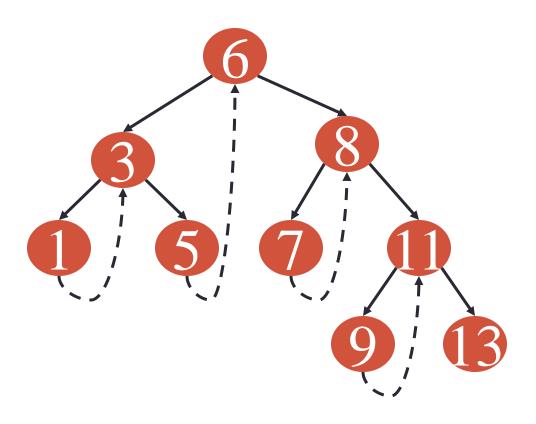


- We start at the leftmost node in the tree, print it, and follow its right thread
- If we follow a thread to the right, we output the node and continue to its right
- If we follow a link to the right, we go to the leftmost node, print it, and continue

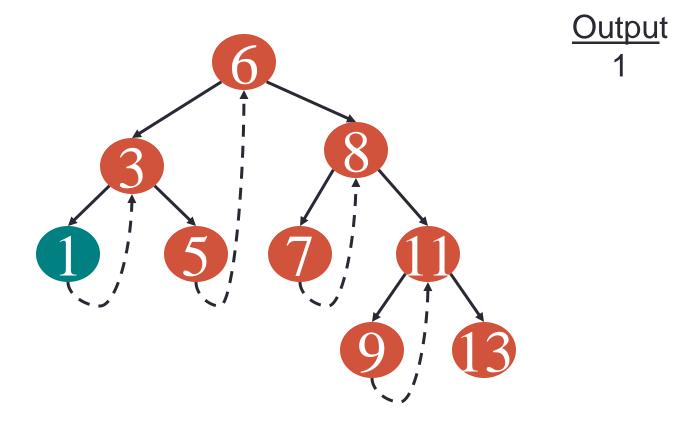


Start at leftmost node, print it

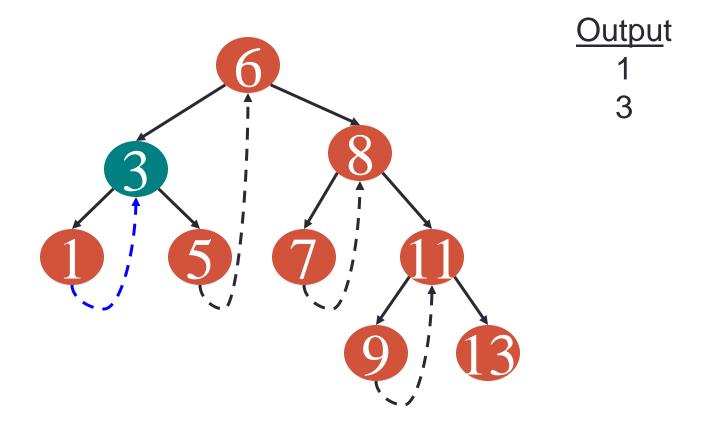


Follow thread to right, print node

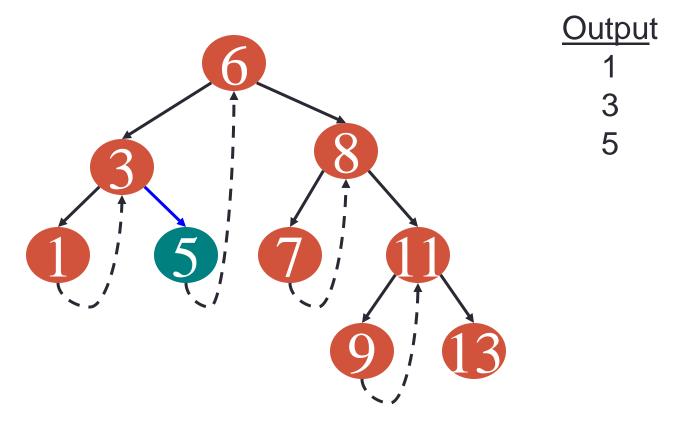


Follow link to right, go to leftmost node and print

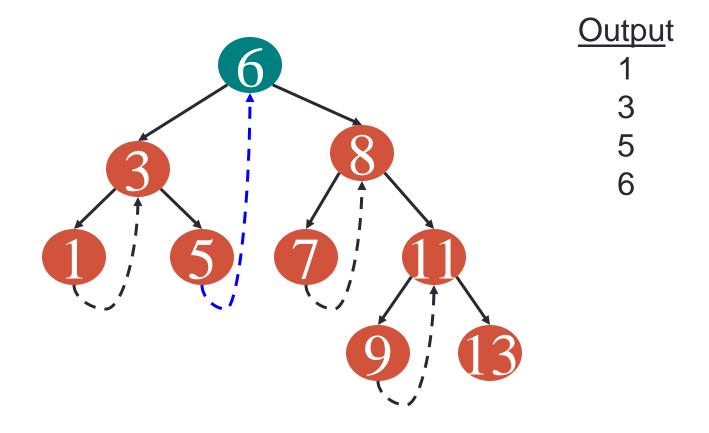


Follow thread to right, print node

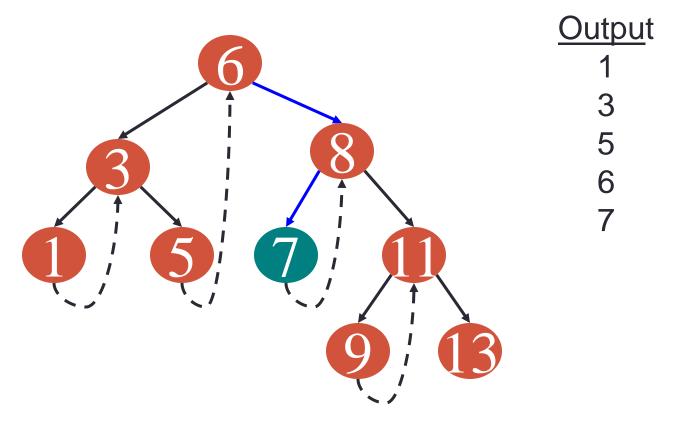


Follow link to right, go to leftmost node and print

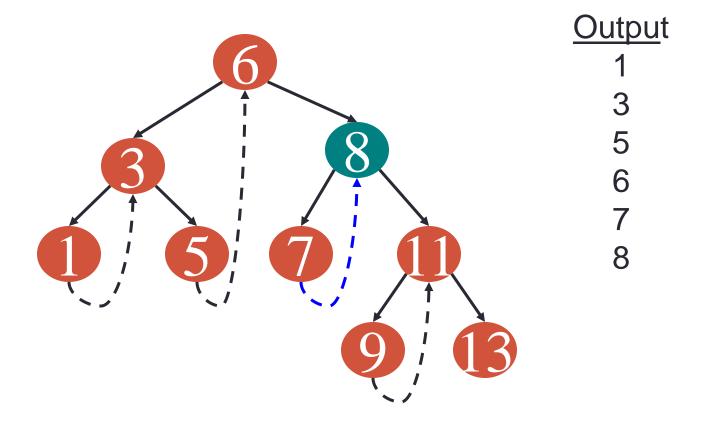


Follow thread to right, print node

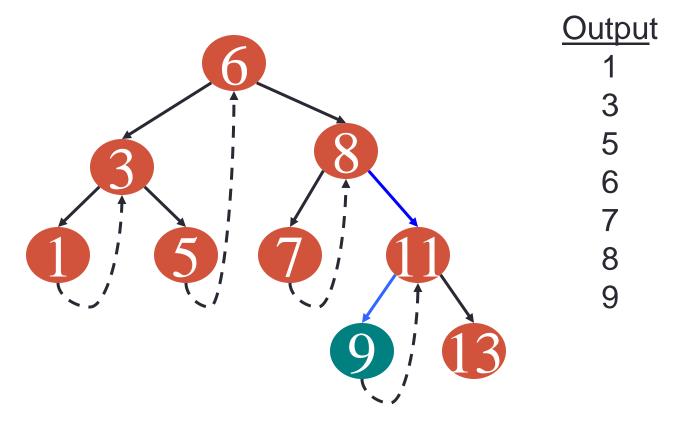

Follow link to right, go to leftmost node and print

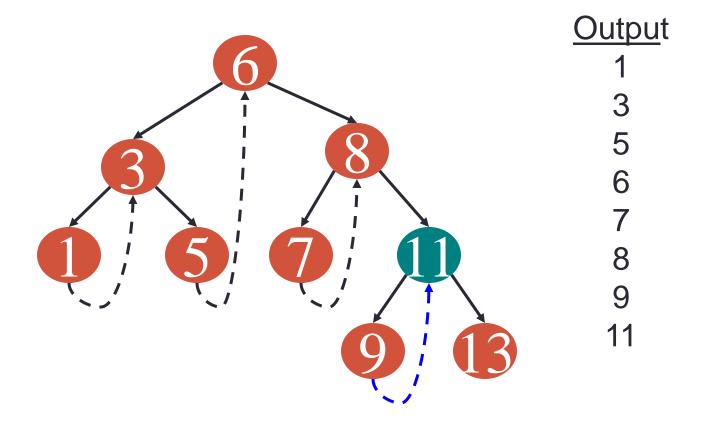

Follow thread to right, print node

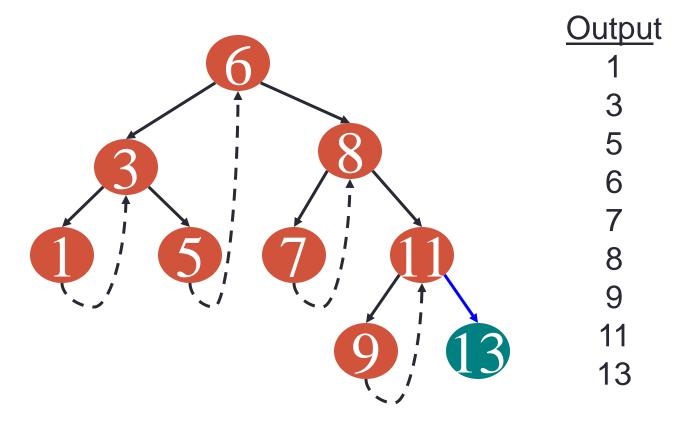

Follow link to right, go to leftmost node and print

```
void inOrder(Node n) {
Node leftMost(Node n) {
                                  Node cur = leftmost(n);
  Node ans = n;
                                  while (cur != null) {
  if (ans == null) {
                                     print(cur);
      return null;
                                     if (cur.rightThread) {
                                        cur = cur.right;
  while (ans.left != null) {
                                     } else {
     ans = ans.left;
                                       cur = leftmost(cur.right);
  return ans;
```

Threaded Tree Modification

- We're still wasting pointers, since half of our leafs' pointers are still null
- We can add threads to the previous node in an inorder traversal as well, which we can use to traverse the tree backwards or even to do postorder traversals

Threaded Tree Modification

